



INSTALLATION AND SAFETY INSTALLTION


1. Mount the crossbar onto Outlet-BOX with screw.
2. Connect the white wire insulated supply wire and the white insulated lead from the fixture with connector.
Connect the black wire insulated supply wire and the black insulated lead from the fixture with connector.
Connect the ground wire on the fixture to the ground supply wire with the green screw.
3. Mount fixture body onto crossbar with 2 screws/nuts.
4. Put bulb in socket ,and secure Art glass on the lamp body.

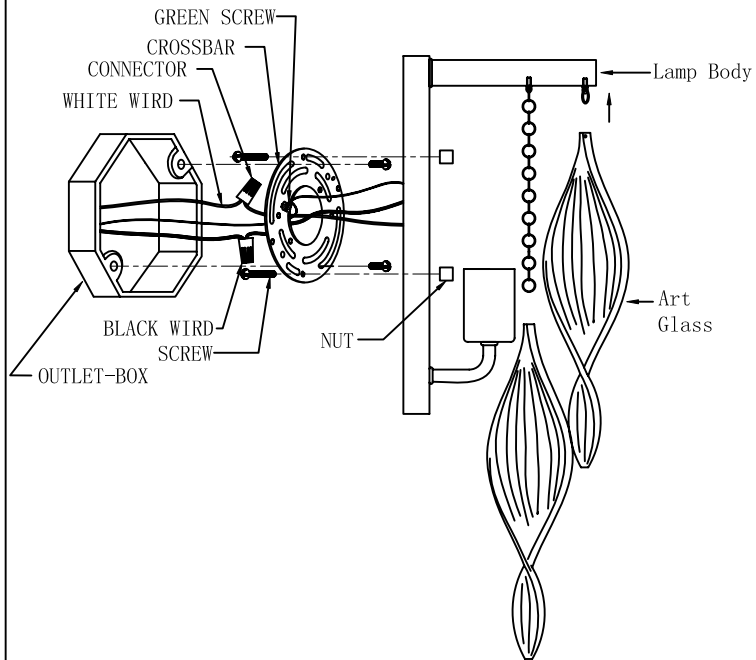

V1370

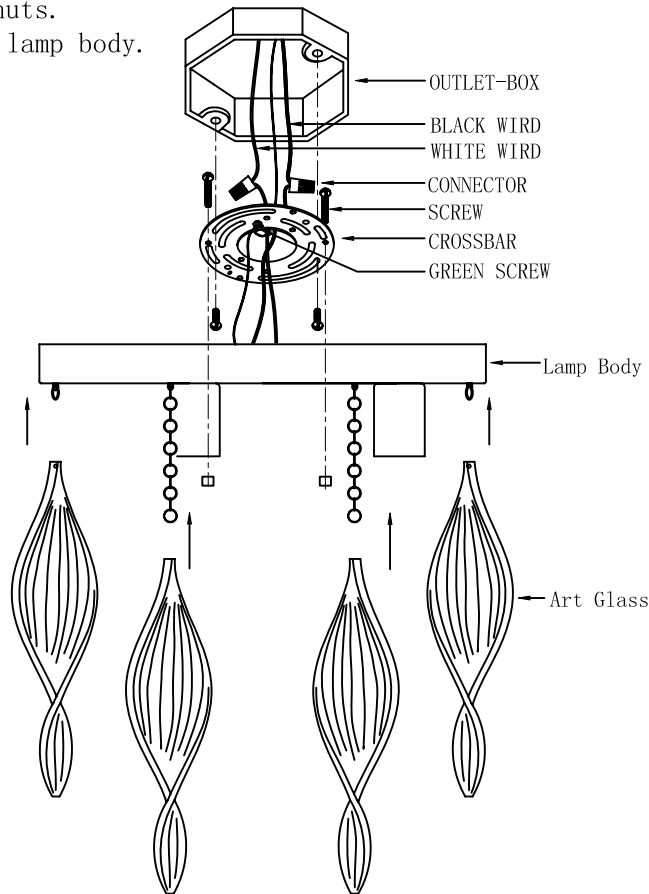

V1373

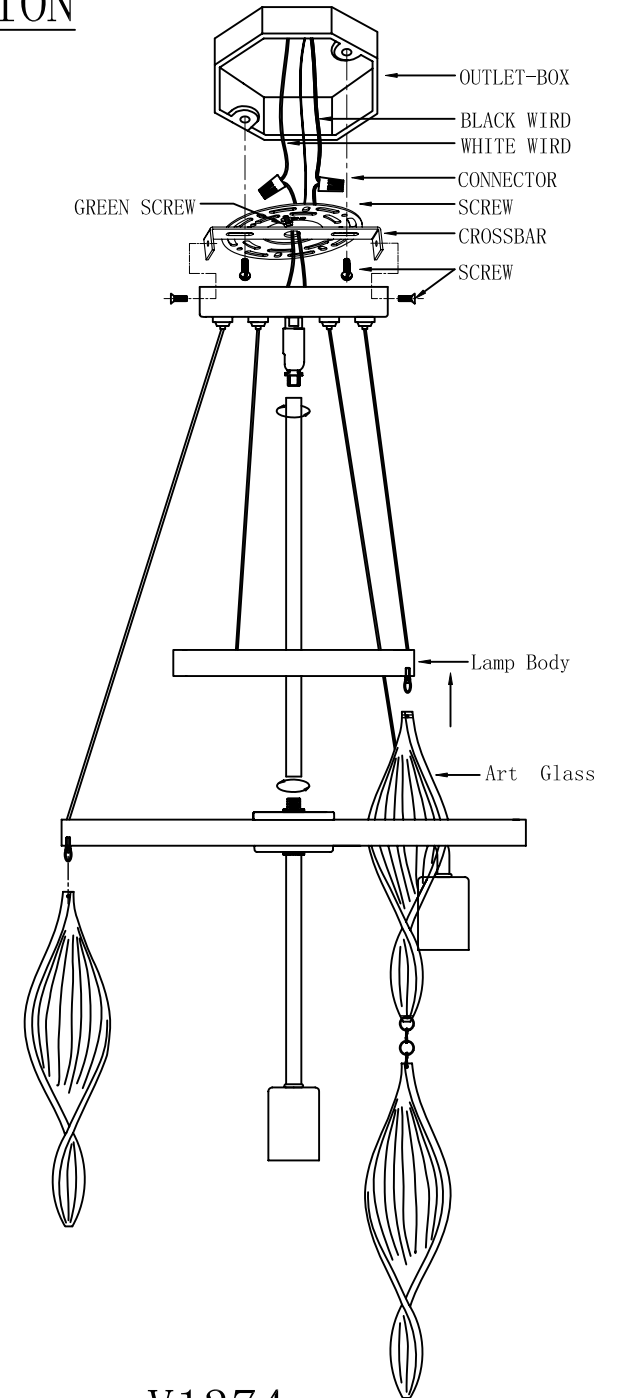

V1374