

INSTALLATION AND SAFETY INSTRUCTIONS

IMPORTANT! DISCONNECT POWER AT MAIN FUSE BOX TO PREVENT POSSIBLE INJURY FROM ELECTRICAL SHOCK.


Remove all parts and parts packages from carton.

1. Thread two long Machine Screws and Green Ground Screw into Mounting Strap.
2. Fasten Mounting Strap to Outlet box (not provided) with Mounting Screw.
3. Connect the wires. Splice the black, smooth, or round Fixture Wires to the Black Supply Wire and the white, ribbed, or flat-sided Fixture Wires to the White Supply Wire using wire Connectors.

CAUTION: Be certain that no bare wire strands are exposed outside of the wire connectors.

4. Attach the Ground wire onto the Mounting Strap with Ground Screw and tighten.
5. Carefully tuck all spliced wires into the Outlet box.
6. Mount Fixture Canopy to ceiling allowing Machine Screws to pass through holes in the Fixture Canopy and secure with 2 Nuts.
7. Thread Acrylic stick into the Lamp body.
8. Turn on power.

The installation is now complete and power may be reconnected at the main fuse box.

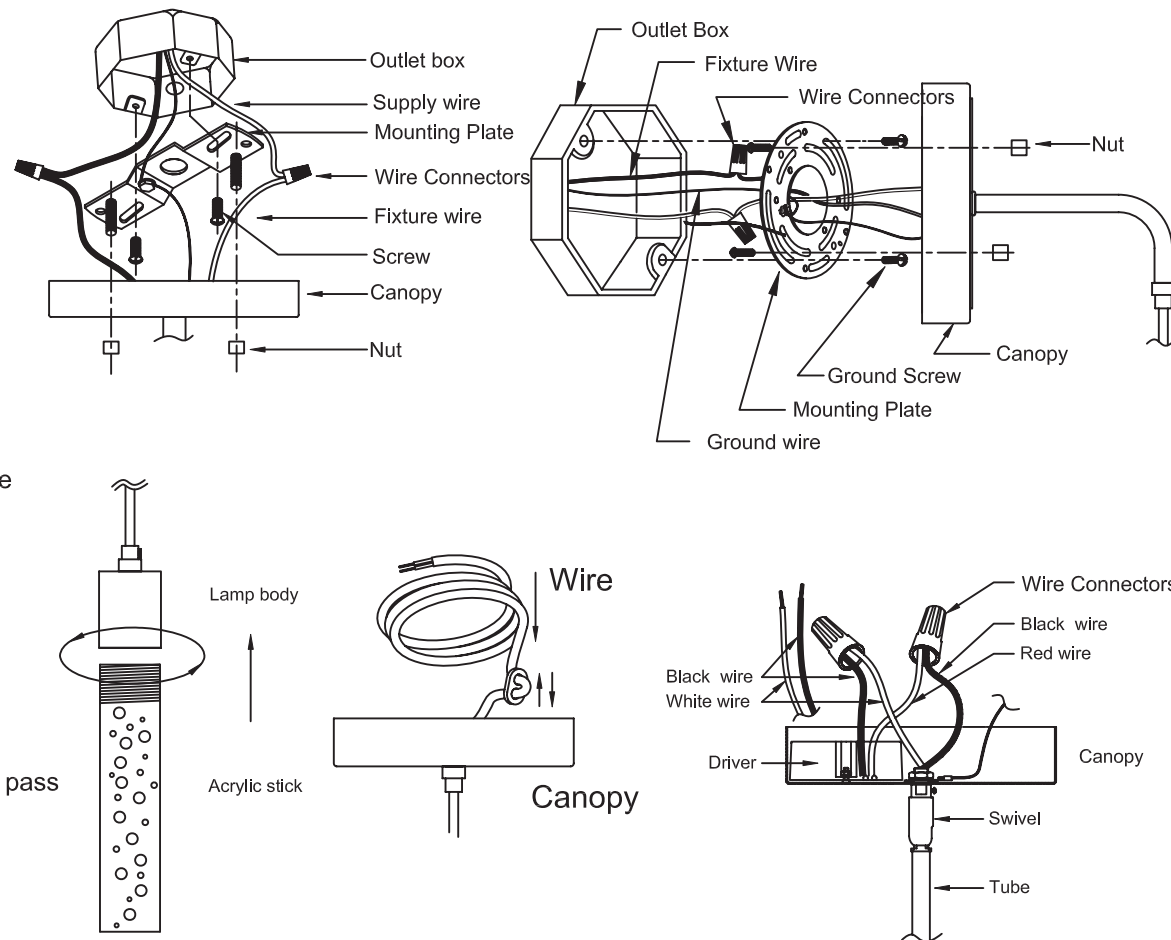

Connect the half of cup wire that is white to Driver Black wire.
Connect the other half of cup wire that is black to Driver Red wire.
Use wire Connectors provided.

VO-253