

GENERAL INSTRUCTION

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes , ordinances , or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended to be mounted to a outlet box. The box must be directly supported by the building structure.
4. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch, is not sufficient to prevent electrical shock.

NOTE

1. The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care factors which cannot be built into any product. These factors must be supplied by the person caring for and operation the fixture.
2. Before installing bulb (s) , refer to the relamping label located near the lamp holder for recommended maximum wattage, do not exceed recommended wattage.

ELECTRICAL CONNECTIONS

Connect the white wire (s) from the fixture to the white wire of the supply circuit . Connect the black wire (s) from the fixture to the black wire of the supply circuit . Use U.L. listed wire connectors suitable for the size, type , and number of conductors . No loose strands or loose connections should be prevented . Secure wire connectors with U.L. listed electrical tape.

FASTENING FIXTURE TO CEILING

Attach crossbar to outlet box with screws, provided on outlet box.

Weave fixture wire and bare grounding wire through alternate chain links , through loop and canopy , split one link of chain and clamp securely to loop.

Attach grounding wire (green or bare copper) from the supply circuit to the mounting bracket with the green grounding attached screw provided. Some models have a grounding wire attached to the fixture. Some models that attach a green or bare copper grounding wire . it will be necessary to connect the green or are grounding wire to the grounding conductor of the supply circuit . Attach all grounding conductors to the mounting bracket with the green grounding attached screw.


NOTE: RE Electrical connections

If your wire from the fixture is clear wire , please place the flat or ribbed side of column wire from the fixture evenly engage the white wire from the outlet box and fit the connector covered the two wires, and screw the connector clockwise in place until you feel a firmness.

Connect the smooth side of column wire from the fixture to the black wire from the outlet box in the same way.


"USE HOOK TO SUPPORT CHAIN , NOT THE ELECTRICAL CORD","LE CROCHET DOIT SUPPORTER LA CHAÎNE ET NON LE CORDON ÉLECTRIQUE".

NOTE:Refer to the proper diagram for hardware set you are having now as below:

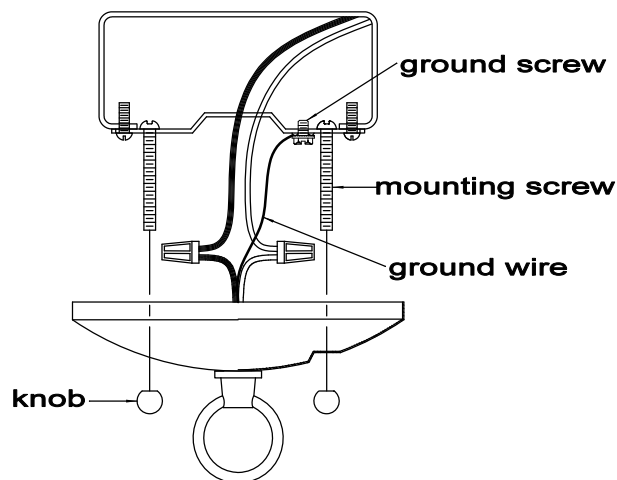

DIA.1

Attach loop to canopy with lockwasher and locknut. Insert mounting screw through canopy and secured with knob.

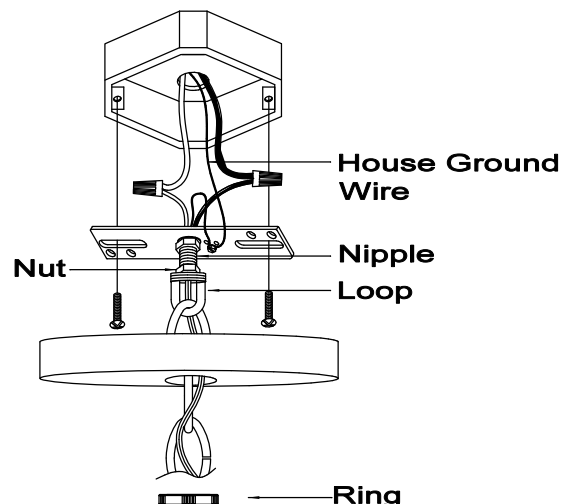

DIA.2







Take the ring off from loop. Screw the nipple into the loop and locked with a nut. Assemble nipple to mounting bracket at the other side. Allow the loop to pass through the canopy and locked with ring.

REMARK:



If your fixture have switch on the down lite(either rotary switch or pull switch),which have 4 functions as:

- A } lamp on for all lite.
- B } candelabra lamp on , down lite-off.
- C } candelabra lamp off , down lite-on.
- D } lamp off for all lite.

VO-105

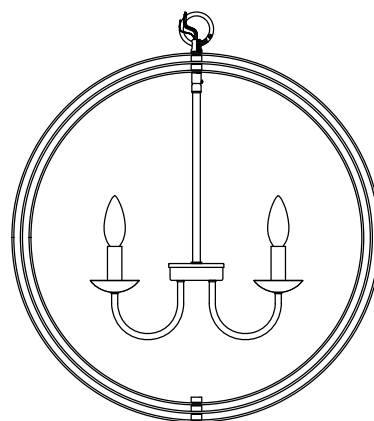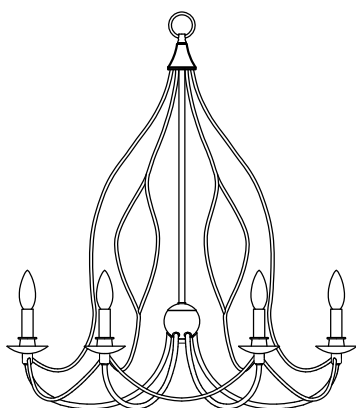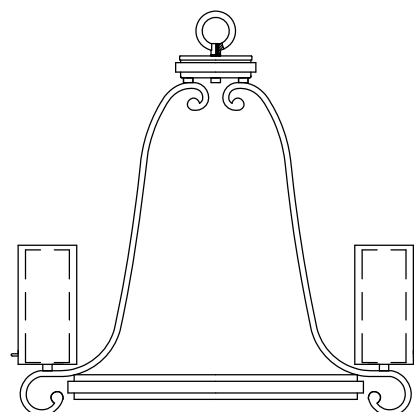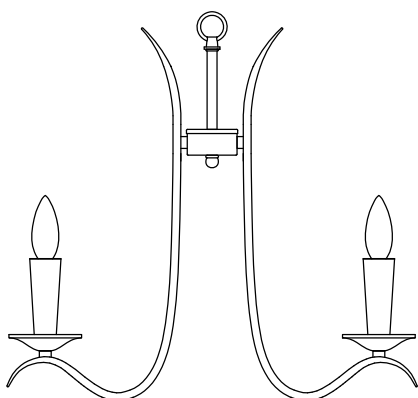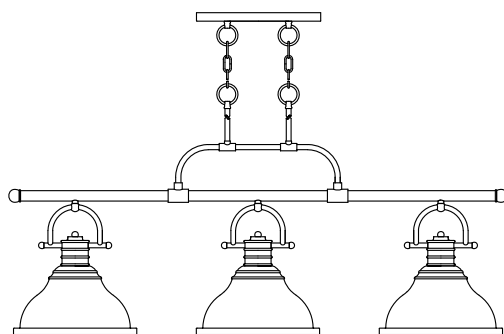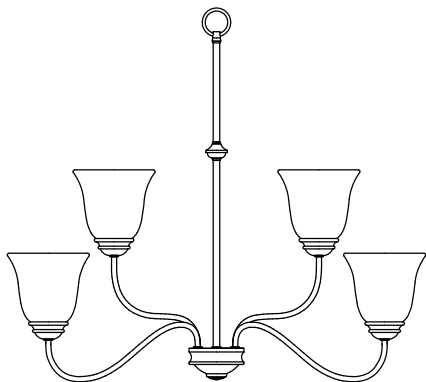

**If your fixture is Close to Ceiling Light,
Please refer to the represented fixture as
below:**

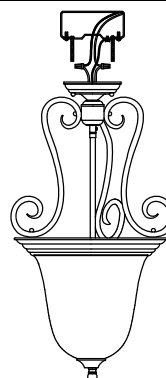

The above diagrams are the representative drawings and may not intended to match the styles of your fixture.