

INSTALLATION AND SAFETY INSTRUCTIONS

IMPORTANT! DISCONNECT POWER AT MAIN FUSE BOX TO PREVENT POSSIBLE INJURY FROM ELECTRICAL SHOCK.

Remove all parts and parts packages from the carton.

Connect the wires. Splice the black, smooth, or round fixture wire to the black supply wire and the white, ribbed, or flat-sided fixture wire to the white supply wire using wire connectors (not provided).



CAUTION: BE CERTAIN THAT NO BARE WIRE STRANDS ARE EXPOSED OUTSIDE OF THE WIRE CONNECTORS.


Attach the house ground wire to the green ground screw mounted to the backplate.

Carefully tuck all spliced wires into the outlet box. Mount backplate to outlet box (not provided) with screws provided with your outlet box using the slots in the backplate.

Insert light bulb(s) (sold separately) into socket. Refer to the label on the fixture for maximum wattage.

To install glass with adjustable cup, slide bottom of glass in between cup and bottom of backplate, press glass firmly against wall and tighten with adjusting screw.

The installation is now complete and the power may be reconnected at the main fuse box.

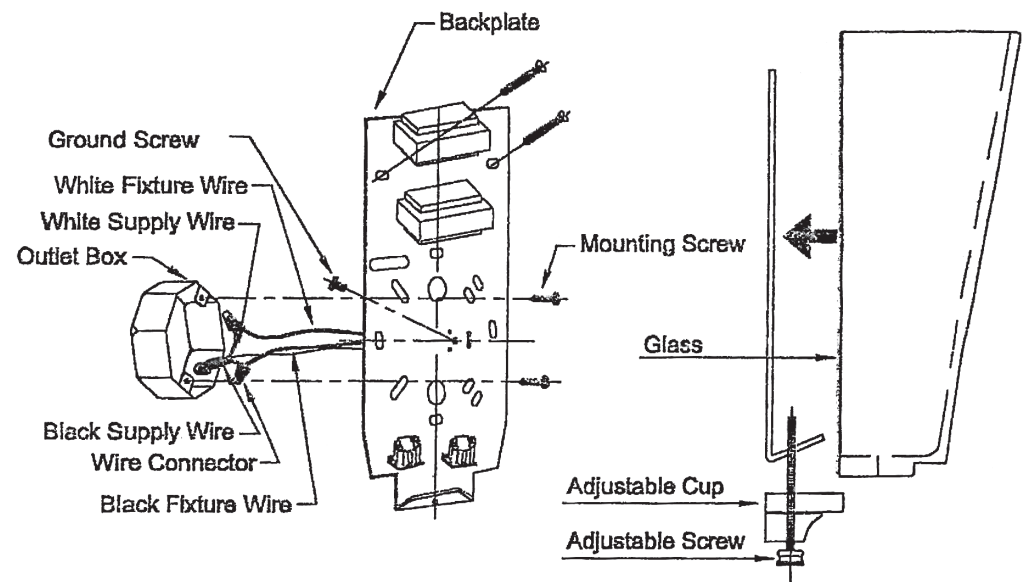

VO-177