

INSTALLATION AND SAFETY INSTRUCTIONS

GENERAL


1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures can be mounted to an outlet box (optional). The box (optional) must be directly supported by the building structure.
4. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors which cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.


CAUTION: Be certain no bare wire strands are exposed outside of wire connectors.

ASSEMBLY AND INSTALLATION

1. Fit the tubing (22) on the socket (23) and install the bulb.
2. Assemble the glass shade (24), ring (21), cap (20) and arm (26) according to the illustration. Tighten the spring bracket (25) and ring (21) to the arm (26) with nut. Use the knob (18) to tighten the nylon washer (19) and cap (20) to the arm (26) too.
3. Tighten the chain loop (17) to the fixture body.
4. Disconnect power at main fuse or circuit breaker box. Then connect the white fixture wire (5) to the white supply wire (3) with the wire connector (6), and connect the black fixture wire (7) to the black supply wire (4) with the connector.
5. Use ground screw (27) to attach the fixture ground wire (8) and the supply ground wire (1) to the mounting bracket (9).
6. Tighten the mounting bracket (9) to the outlet box (2) with mount screw (10).
7. Use nut (12) and washer (11) to lock the threaded pipe (13) into the mounting bracket (9).
8. Pass the loop body (15) through the canopy (14) and tighten it to the threaded pipe (13).
9. Attach one end of the chain (16) to the loop body (15) and the other end to the chain loop (17).
10. Adjust the fixture body and reconnect the power supply.

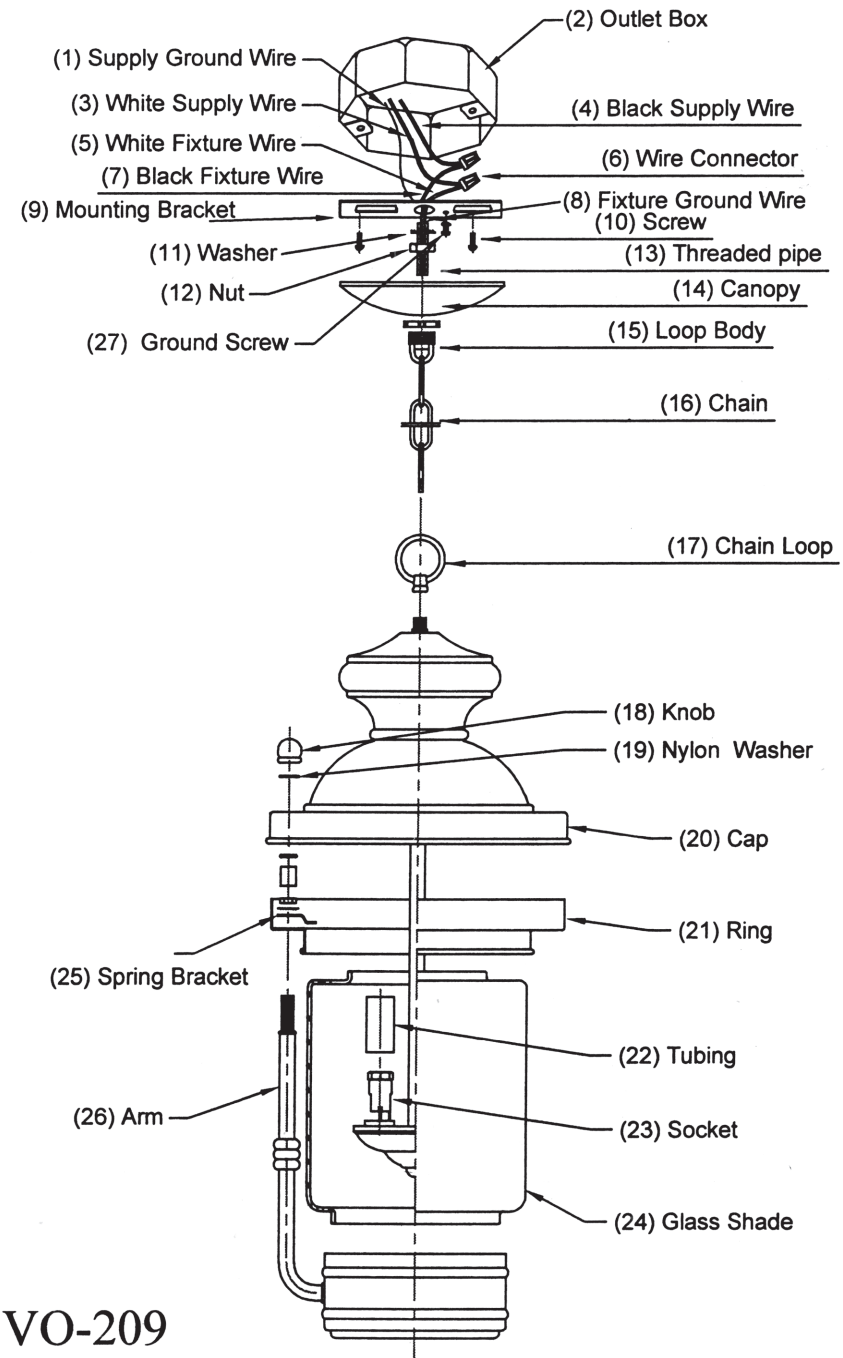

VO-209

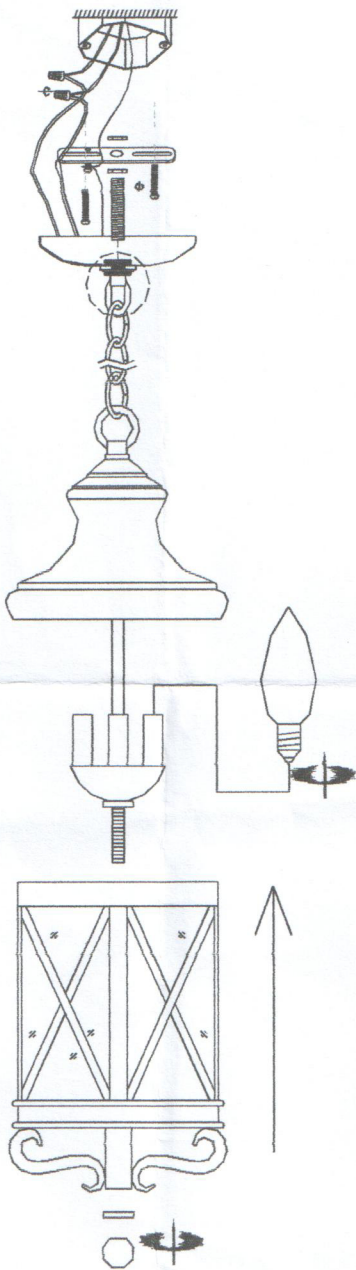

V8681-46