



# TL120-20

1-Light Integrated LED Indoor Silver Gray Mini Adjustable Step Cylinder Track Head with Gimbal Ring

Catalog #:

Type:

Project:


Prepared By:

*Because Lighting Speaks Volumes*

## Description

This integrated LED indoor silver gray mini adjustable step cylinder track head features a gimbal ring. Go green and save big. Energy-efficient LED is environmentally friendly and requires substantially less electricity to maintain, passing down cost-cutting savings to you. Enjoy this piece's sleek, modern design. Clean, minimal, and solid color design blends in seamlessly with surroundings and existing décor. Powder-coated paint base finish provides phenomenal long-lasting color and exceptional corrosion/scratch resistance. Compact light fits easily in small spaces. Compatible with Volume Lighting 120V 1-circuit/1-neutral track systems V2702-20 (2 ft. track section), V2704-20 (4 ft. track section), V2706-20 (6 ft. track section), and V2708-20 (8 ft. track section). Also compatible with Volume Lighting 120V 2-circuit/1-neutral track systems V2762-20 (2 ft. track section), V2764-20 (4 ft. track section), V2766-20 (6 ft. track section), and V2768-20 (8 ft. track section). Adjustable track head tilts up to 90° and rotates 355° around vertical axis. Perfect complement to stainless-steel appliances, kitchens, living rooms, hallways, exhibits, restaurants, studios, and many other indoor areas. Suitable for dry locations only. Finished in silver gray. Feel confident in a quality product. Integrated LED comes with a 5-year limited warranty.

Light Source Included?	Yes (Integrated LED)
Light Bulb(s) Included?	N/A (Integrated LED Light Source Included)
CRI	80
Color Temperature (K)	3000
Lumens per Light	790
Total Lumens	790
Beam Angles	30°
Output Power Supply	Class II
Power Factor (Pf)	>.9
THD	<20%
Life Rated (Hours)	50,000
Dimmable?	Yes (TRIAC/ELV, 5% [120V Only])
Base	N/A (Integrated LED)
Input Voltage (Volts)	120V at 50/60 Hz (System Adapter Dependent)
Compliances	FCC Compliant, RoHS Compliant
Safety Ratings	cETLus Listed
Assembly	No Assembly Required
Accessory 1 (Sold Separately)	V2718-20 Silver Gray Monopoint Canopy (4375" H x 5" W x 5" L Circle)
Accessory 2 (Sold Separately)	V2702-20 2 ft. Silver Gray 120V 1-Circuit / 1-Neutral Track System / Section / Rail
Accessory 3 (Sold Separately)	V2704-20 4 ft. Silver Gray 120V 1-Circuit / 1-Neutral Track System / Section / Rail
Accessory 4 (Sold Separately)	V2706-20 6 ft. Silver Gray 120V 1-Circuit / 1-Neutral Track System / Section / Rail
Accessory 5 (Sold Separately)	V2708-20 8 ft. Silver Gray 120V 1-Circuit / 1-Neutral Track System / Section / Rail
Accessory 6 (Sold Separately)	V2762-20 2 ft. Silver Gray 120V 2-Circuit / 1-Neutral Track System / Section / Rail
Accessory 7 (Sold Separately)	V2764-20 4 ft. Silver Gray 120V 2-Circuit / 1-Neutral Track System / Section / Rail
Accessory 8 (Sold Separately)	V2766-20 6 ft. Silver Gray 120V 2-Circuit / 1-Neutral Track System / Section / Rail
Accessory 9 (Sold Separately)	V2768-20 8 ft. Silver Gray 120V 2-Circuit / 1-Neutral Track System / Section / Rail
Accessory 10 (Sold Separately)	V2791-20 12" Silver Gray Extension Wand (Compatible with 120V 1-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 11 (Sold Separately)	V2795-20 18" Silver Gray Extension Wand (Compatible with 120V 1-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 12 (Sold Separately)	V2792-20 24" Silver Gray Extension Wand (Compatible with 120V 1-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 13 (Sold Separately)	V2793-20 36" Silver Gray Extension Wand (Compatible with 120V 1-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 14 (Sold Separately)	V2794-20 48" Silver Gray Extension Wand (Compatible with 120V 1-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 15 (Sold Separately)	V2791-20 12" Silver Gray Extension Wand (Compatible with 120V 2-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 16 (Sold Separately)	V2795-20 18" Silver Gray Extension Wand (Compatible with 120V 2-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 17 (Sold Separately)	V2792-20 24" Silver Gray Extension Wand (Compatible with 120V 2-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 18 (Sold Separately)	V2793-20 36" Silver Gray Extension Wand (Compatible with 120V 2-Circuit / 1-Neutral Volume Lighting Track Systems)
Accessory 19 (Sold Separately)	V2794-20 48" Silver Gray Extension Wand (Compatible with 120V 2-Circuit / 1-Neutral Volume Lighting Track Systems)
Integrated LED Warranty	5-Year Limited Warranty

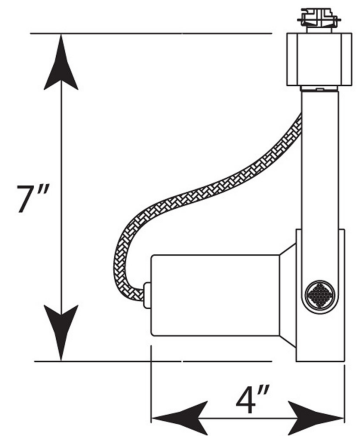

## Specifications

Style	Modern
Type of Lighting	Indoor Track Lighting
Product Type	Track Head
Product Subtype	Mini, Gimbal Ring, Adjustable
Height (in.)	7
Width (in.)	TBD
Length or Extension/Projection (in.)	4
Finish	Silver Gray
Main Material	Polymer/Plastic (Powder-Coated Paint Finish)
Light Direction	Adjustable (90° Tilt from Vertical Axis) (355° Rotation Around Vertical Axis)
Installation/Mounting Position	Downward
Installation Location	Dry
Light #	1
Watts per Light (W)	9
Total Wattage (W)	9

## At a Glance

- Sturdy, Exquisite Construction
- 5-Year Limited Warranty on Integrated LED (Included with Purchase)
- Perfect Complement to Stainless-Steel Appliances, Kitchens, Living Rooms, Hallways, Exhibits, Restaurants, Studios, and Many Other Indoor Areas
- Silver Gray Finish
- Powder-Coated Hard Surface Provides Long-Lasting Color and Corrosion/Scratch Resistance
- Go Green—Environmentally Friendly, Energy-Efficient Integrated LED
- Clean, Minimal, and Solid Color Design Blends in Seamlessly with Surroundings and Existing Décor
- Compact Light Fits Easily in Small Spaces
- Compatible with Volume Lighting 120V 1-Circuit/1-Neutral Track Systems V2702-20 (2 ft. Track Section), V2704-20 (4 ft. Track Section), V2706-20 (6 ft. Track Section), and V2708-20 (8 ft. Track Section)
- Compatible with Volume Lighting 120V 2-Circuit/1-Neutral Track Systems V2762-20 (2 ft. Track Section), V2764-20 (4 ft. Track Section), V2766-20 (6 ft. Track Section), and V2768-20 (8 ft. Track Section)
- Adjustable Track Head (90° Tilt from and 355° Rotation Around Vertical Axis)
- 30° Beam Angle / 790 Lumens / 3000K Color Temperature / 80 CRI
- Dimmable (TRIAC/ELV, 5% [120V Only])
- Suitable for Dry Locations Only
- Heat-Resistant Components Withstand Up to 9 Watts
- 1-Light Fixture (Integrated LED Included)
- Individually Inspected for Quality Assurance
- cETLus Rated for Safety